




Technical Data

RECESSED WALL URN

B-37603

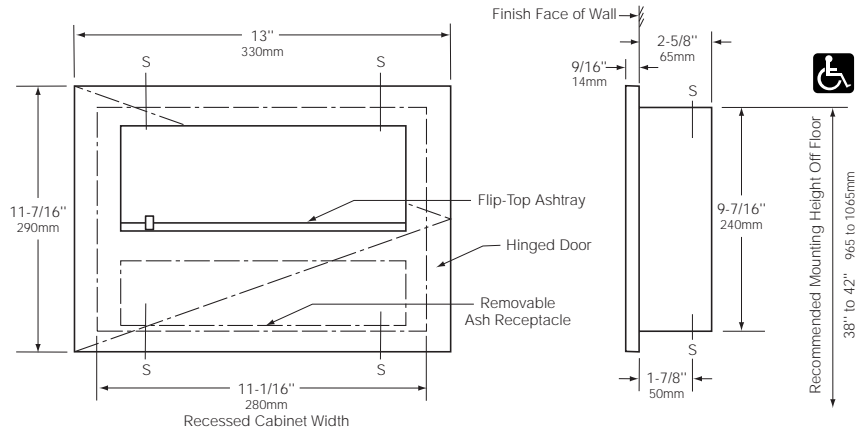

Rough Wall Opening
11-3/8" (290mm) wide
9-7/8" (250mm) high
3" (76mm) minimum recessed depth

MATERIALS:

Cabinet — 18-8 S, type-304, heavy-gauge stainless steel. All-welded construction.

Flange — 18-8 S, type-304, heavy-gauge stainless steel. Drawn, one-piece, seamless construction.

Door — 18-8 S, type-304, 18-gauge (1.2mm) stainless steel with satin finish. 9/16" (14mm) 90° return to wall for maximum rigidity. Secured to cabinet with a concealed, full-length, stainless steel piano-hinge. Equipped with a stainless steel cable door-swing limiter and friction catch. International graphic symbol identifies ashtray.

Flip-Top Ashtray — 18-8 S, type-304, 22-gauge (0.8mm) stainless steel with satin finish. Secured to cabinet with full-length, stainless steel piano-hinge. Consists of one fixed panel with hemmed edge and one self-closing hinged panel. Theft-resistant.

Inner Ash Receptacle — Aluminum construction. Removable for servicing.

OPERATION:

Flip-top ashtray activated by push lever. Ashes fall into removable inner ash receptacle; does not require sand or water to extinguish embers. Cable door-swing limiter prevents damage to washroom accessories and walls.

INSTALLATION:

Provide framed rough wall opening 11-3/8" wide x 9-7/8" high (290 x 250mm). Minimum recessed depth required from finish face of wall is 3" (76mm). Allow clearance for construction features that may protrude into rough wall opening from opposite wall. Coordinate with mechanical engineer to avoid pipes, vents, and conduits. Mount unit in wall opening with shims between framing and cabinet at all points indicated by an S, then secure unit with sheet-metal screws (not furnished).

SPECIFICATION:

Recessed wall urn shall be type-304 stainless steel with all-welded construction. Exposed surfaces shall have satin finish. Flange shall be drawn, one-piece, seamless construction. Door with 9/16" (14mm) 90° return to wall shall be secured to cabinet with a concealed, full-length, stainless steel piano-hinge; equipped with stainless steel cable door-swing limiter; held closed with concealed latch; and equipped with international graphic symbol identifying ashtray. Flip-top ashtray shall be secured to cabinet with a full-length stainless steel piano-hinge and shall consist of one fixed panel with hemmed edge and one self-closing hinged panel to allow ashes to fall into ash receptacle. Unit shall be furnished with removable aluminum inner ash receptacle. Manufacturer's service and parts manual shall be provided to the building owner/manager upon completion of project.

Recessed Wall Urn shall be Model B-37603 of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment of Canada Ltd., Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.