




Technical Data

RECESSED STAINLESS STEEL MEDICINE CABINET

B-398

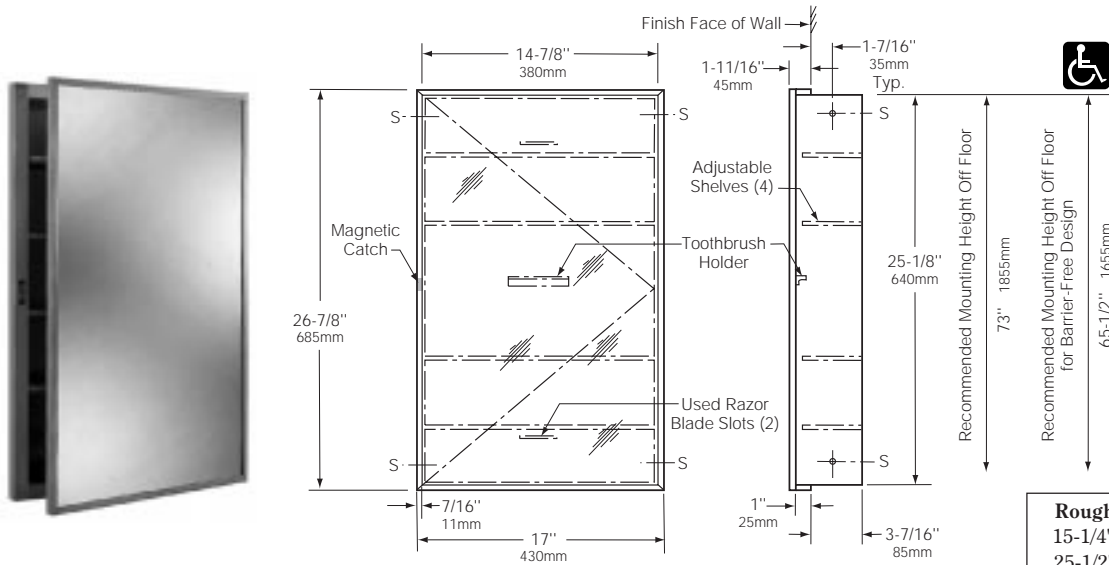

<p>Rough Wall Opening 15-1/4" (385mm) wide 25-1/2" (650mm) high 3-5/8" (92mm) minimum recessed depth</p>

MATERIALS:

Cabinet — 18-8 S, type-304, 22-gauge (0.8mm) stainless steel. All-welded construction. Two slots for used razor blades.

Door — 18-8 S, type-304 stainless steel with satin finish. Secured to cabinet with full-length stainless steel piano-hinge. Equipped with a magnetic catch and stainless steel cable door-swing limiter. Toothbrush holder on back of door.

Mirror — No. 1 quality, 1/4" (6mm) thick, select float glass: selected for silvering, electrolytically copper-plated by the galvanic process, and guaranteed for 15-years against silver spoilage. Back is protected by full-size, shock-absorbing padding.

Interior Shelves (4) — 18-8 S, type-304, 22-gauge (0.8mm) stainless steel with satin finish; roll-formed edges.

OPERATION:

Door is retained by means of a magnetic catch. The four shelves are adjustable. Two slots for used razor blades are in rear of cabinet. Toothbrush holder is located on back of door and accommodates four toothbrushes. Cable door-swing limiter prevents damage to washroom accessories and walls.

INSTALLATION:

Cabinet may be inverted for right- or left-hand door swing. Provide framed rough wall opening 15-1/4" wide x 25-1/2" high (385 x 650mm). Minimum recessed depth required to finish face of wall is 3-5/8" (92mm). Allow clearance for construction features that may protrude into rough wall opening from opposite wall. Coordinate with mechanical engineer to avoid pipes, vents, and conduits in wall. If unit projects above top of wainscot, provide aluminum channel or other filler to eliminate gap between flange and finish face of wall. Mount cabinet with shims between framing and cabinet at all points indicated by an S, then secure unit with #8 x 1-1/2" (4.2 x 38mm) sheet-metal screws (not furnished).

SPECIFICATION:

Recessed medicine cabinet shall be type-304 stainless steel with all-welded construction; exposed surfaces shall have satin finish. No. 1 quality, 1/4" (6mm) thick, select float glass mirror shall be guaranteed against silver spoilage for 15 years and shall be mounted in door. Door shall be secured to cabinet with full-length stainless steel piano-hinge, retained by means of a magnetic catch, and equipped with a stainless steel cable door-swing limiter. Cabinet shall have four adjustable stainless steel shelves. Two slots for used razor blades shall be located in rear of cabinet. Toothbrush holder shall accommodate four toothbrushes and be located on back of door. Unit shall be invertible for choice of right- or left-hand door swing. Manufacturer's service and parts manual shall be provided to the building owner/manager upon completion of project.

Recessed Stainless Steel Medicine Cabinet shall be Model B-398 of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment of Canada Ltd., Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.